
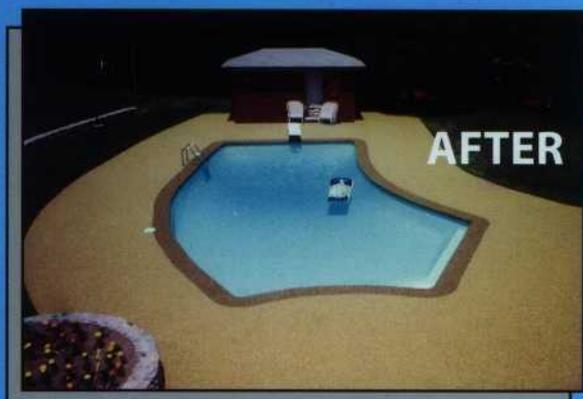


SIERRA STONE

The Great Cover-Up!

*If your
concrete
has problems
like this...*

*...we have a
beautiful
solution!*

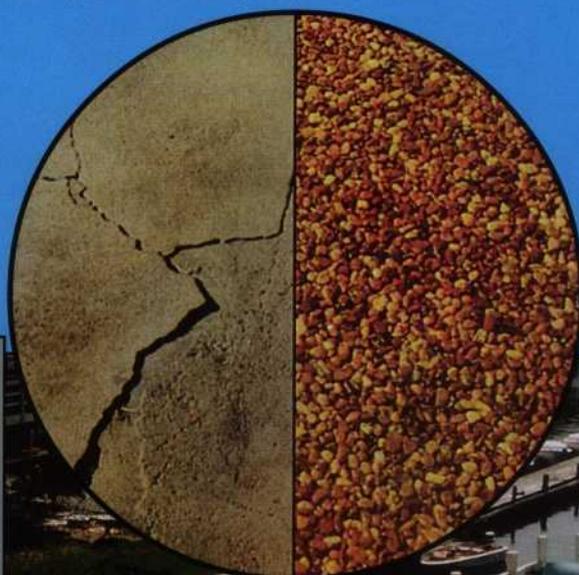

THE GREAT COVER-UP

SIERRA STONE INC.

BENEFITS

SIERRA STONE® is the elegant, designer's solution to ugly, uneven, cracked or stained concrete, tile or other composition surfaces. It is an extremely attractive pavement resurfacing that is applied directly over problem areas, providing a new and beautiful surface that dramatically improves the appearance of such areas. Best of all, **the old surface does not have to be removed...** it is permanently covered. SIERRA STONE is a smooth river gravel dredged from old and new riverbeds throughout the country. It is washed, sized, kiln-dried, measured and bagged for shipping. This stone is mixed on the job site with our specially-formulated epoxy adhesive, SIERRA BOND®, which has been developed for this one purpose and which is laboratory-tested to be stronger than the stone itself. SIERRA STONE offers the complete surfacing system—from the careful combination of technical-grade materials to the custom design, installation and hand-finishing by selected carefully trained crews. SIERRA STONE... **the great cover-up...** will add years of visual beauty and value to any property.

UNIVERSAL APPLICATION.

SIERRA STONE can be applied over virtually any solid surface with proper preparation, thereby affording the commercial or residential user an easy solution to contractor's mistakes, natural disaster, weathering, or just surface aging.

BEAUTY. SIERRA STONE's natural stone look and shine is unmatched by any other outdoor paving surface.

LOW MAINTENANCE. An occasional washing with a hose will keep SIERRA STONE beautiful.

STAIN RESISTANT. Oil, grease, dirt, gasoline, acid, etc., will clean up easily, and will not attack SIERRA STONE.

POROUS. SIERRA STONE is porous, eliminating standing water (no puddles). Like water flowing through sand, water runs through SIERRA STONE. Can be installed over drains since water will flow through stone to drain. SIERRA SEALCOTE epoxy will waterproof those surfaces requiring waterproofing beforehand.

ELASTICITY. SIERRA BOND has 25% elasticity (ASTM D-638) which allows for most subsurface expansion and contraction.

SEAMLESS. SIERRA STONE can be installed without regard to expansion joints and without seams, making it a designer's choice.

STRENGTH. SIERRA STONE is manufactured and installed to withstand heavy traffic such as showrooms, garages, and pedestrian walkways.

REPAIR. SIERRA STONE can be repaired with hardly a trace should something chip or crack it.

FREEZE-THAW RESISTANCE. SIERRA STONE is installed from Canada to Haiti, Bermuda to Guam (and most places between). Ice, snow, and freezing weather will not affect it.

SHORT "CURE TIME". SIERRA STONE quickly cures in a matter of hours, and can be walked on and driven on not long after installation.

LOW INSTALLATION COST. SIERRA STONE costs less than terrazzo, brick, slate, tile or flagstone, yet looks better and is easier to maintain.

SIERRA STONE APPLICATIONS. SIERRA STONE is ideal for commercial and residential resurfacing over virtually any existing hard surface (except earth):

- showrooms
- office building entrances, courtyards
- patios
- swimming pool decks
- shopping center walk areas
- display areas
- restaurant areas

Sierra Bond® Epoxy

PHYSICAL PROPERTIES

	Mixed	Component A (Resin) / Component B (Curing Agent)	
		Unmixed	Unmixed
Weight	8.8 lbs/gal 1.0476 kg/l	9.4 lbs/gal 1.1191 kg/l	8.1 lbs/gal .9643 kg/l
Viscosity @ (75°F/24°C)	2,000 - 3,000 CPS	5,000 - 6,000 CPS	450 - 550 CPS
Specific Gravity @ (75°F/24°C)	1.06	1.13	0.97
Solids by weight	100%	—	—
Pot Life 100 gm @ (75°F/24°C)	21 - 26 minutes	—	—
Color	Light yellow (clear)	Straw yellow (clear)	Amber (clear)
Shelf Life (closed containers)	—	—	1 year

PRODUCT TESTING

Hardness (Shore D @ 75°F) (ASTM D-2240)	79	Tensile Elongation (% @ 75°F) (ASTM D-638)	25
Hardness (Shore A @ 150°F) (ASTM D-2240)	80	Adhesion (Tensile Shear, psi @ 75°F)	
Tensile Strength (psi @ 75°F) (ASTM D-638)	6,000	(ASTM D-1002)	2000

SIERRA STONE INC.

P.O. Box 852

7000 Sierra Blvd., San Diego, CA 92121

DISTRIBUTED BY:

2000 Sierra Blvd., San Diego, CA 92121

7000 Sierra Blvd., San Diego, CA 92121